

The Lighting Division



The Lighting Division
 100 Boxart Street - Suite 230
 Rochester, NY 14612
 Phone: 585.697.0093
 Fax: 585.663.1432


Inside Cabinet Lighting and Under Glass Shelf Application



Light Fixtures

Cabinet Width or Glass Shelf Length	Model Number	High Intensity	
		Qty	Total # of LEDs
6"	GSH-065-XX	3	_____
10.5"	GSH-110-XX	6	_____
15"	GSH-155-XX	9	_____
19.5"	GSH-200-XX	12	_____
24"	GSH-245-XX	15	_____
28.5"	GSH-290-XX	18	_____
33"	GSH-335-XX	21	_____
37.5"	GSH-380-XX	24	_____
42"	GSH-425-XX	27	_____
46.5"	GSH-470-XX	30	_____
51"	GSH-515-XX	33	_____
55.5"	GSH-560-XX	36	_____
60"	GSH-605-XX	39	_____
64.5"	GSH-650-XX	42	_____
69"	GSH-695-XX	45	_____
73.5"	GSH-740-XX	48	_____
78"	GSH-785-XX	51	_____
82.5"	GSH-830-XX	54	_____
87"	GSH-875-XX	57	_____
91.5"	GSH-920-XX	60	_____
96"	GSH-965-XX	63	_____

Circuit Guide

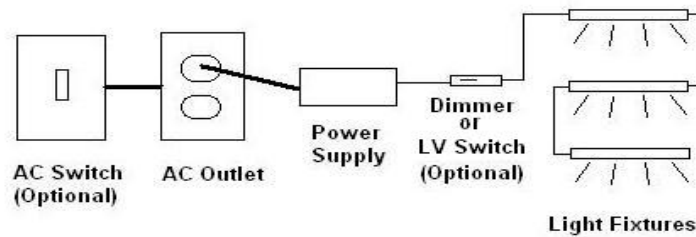

Power Supplies

Model Number	Power up to:	Qty
TLD-6WSI	45 LEDs	_____
TLD-24WSI	180 LEDs	_____
TLD-40WSI	300 LEDs	_____
TLD-60WSO	450 LEDs	_____

Low Voltage Wire - twin 22 AWG

Model Number	Feet	Qty
TLD-LV1	100	_____

Dimmers/Low Voltage Switches

Model Number	Control up to:	Qty
TLD-DM1	300 LEDs	_____
TLD-SW1	400 LEDs	_____

Fixture Width

Fixture is approximately 1" Wide by
1/4" Thick

Notes:

- 1 - Substitute Color Code for "XX" **(Other Colors Available as Custom Product)**
 WW Warm White (2800K)
 CW Cool White (7300K)
- 2 - Double Sided Tape is standard on both bottom and top sides of fixture
- 3 - TLD-60WSO is outdoor rated - other supplies may be used outdoors with suitable enclosure
- 4 - Only PWM (Pulse Width Modulation) type dimmers can be used